


ST-3/FLEX2500: Read all 3 phases simultaneously



ST-3/FLEX-CT2500 or ST-3/FLEX-CT5000 Current Probes

This accessory is used for comparing primary to secondary current.

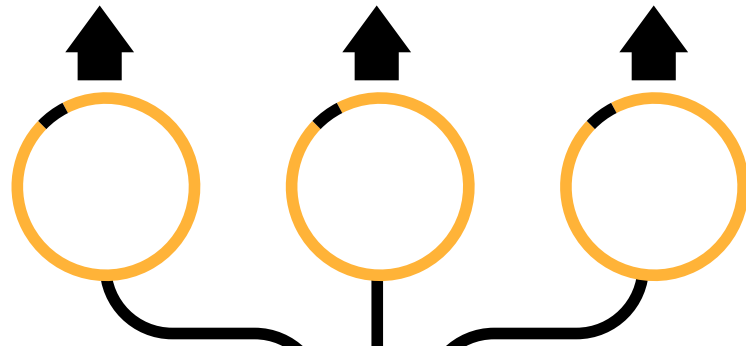

ST-3/FLEX-CT2500
Range from 0 to 2500 amp*
auto-detection and electronically compensated with an accuracy of 0.5%.

*ST-3/FLEX-CT5000 available with a range from 0 to 5000 amp.



Overall length 15'
(Extension available 50' or 100')